

M30D HDSP+ETH



2-Channel Power Amplifier with DSP and Ethernet for Portable and Permanently Installed Applications



- ✓ Touring
- ✓ Installation

2CH



DSP
on board



- ▶ Small to medium-scale systems, portable and installed
- ▶ Subwoofers
- ▶ Bi-amped loudspeakers
- ▶ Hotels, restaurant and bars
- ▶ Amusement parks, themed entertainment
- ▶ Houses of worship, auditoriums
- ▶ Educational facilities
- ▶ Live and dance clubs
- ▶ Mobile DJ's

Equally versatile in both portable and installed system configurations and with delivering up to 3,000 W out of one single rack unit weighing just over 7 kg / 16 lb, the **M30D HDSP+ETH** is a highly flexible, cost-effective solution for small to medium sound systems.

The **M30D HDSP+ETH** provides unparalleled levels of control and monitoring through the Armonia Pro Audio Suite™ software, with the same user interface and on the same network as all Powersoft amplifiers. Locally, the **M30D HDSP+ETH** lets the user access up to four presets per pushbutton on the rear panel. Furthermore, the high-performance DSP is tucked away inside and safe against accidental or intentional tampering.

Benefitting from core technologies of Powersoft's flagship K Series, the **M30D HDSP+ETH** sets a class standard in efficiency leading to low power consumption, and consequently to less money spent on electricity, all in an eco-friendly way.

The **M30D HDSP+ETH** comes with 4 years warranty and, like all Powersoft products, is entirely designed and made in Italy.

2-channel mode				mono-bridged mode
4 Ω / Ch	8 Ω / Ch	70 V ¹⁾	100 V ²⁾	8 Ω / Ch pair
1,500 W	900 W	1,200 W	1,500 W	3,000 W

EIAJ Test Standard, 1 kHz, 1% THD

- ✓ **Legendary Powersoft efficiency:**
 - ▶ Compact and space saving: 2 channels in 1 RU at 358 mm / 14.1" depth
 - ▶ Green Audio Power®: minimal "carbon footprint" and operational cost of electricity
 - ▶ Plenty of power, less weight: up to 3,000 W in 7.3 kg / 16 lb
- ✓ **Driving distributed line systems:**
 - ▶ Able to drive 70 V/100 V distributed lines directly without the need for transformers^{1) 2)}
- ✓ **Unique Powersoft technology for efficient, reliable performance:**
 - ▶ Switch mode power supply, internally switchable 230/115 V nominal
 - ▶ Fixed frequency switch mode amplifier output stages
 - ▶ Patented amplifier output filters with ripple cancellation network
- ✓ **Direct PC/network connection:**
 - ▶ Ethernet interface for system setup, monitoring and control
 - ▶ Fully manageable via Armonia Pro Audio Suite™ software
 - ▶ On the same network as all the other Powersoft amplifiers
- ✓ **Top-grade DSP on board:**
 - ▶ Dual 24-bit A/D & D/A with high dynamic range; crossover filters for bi-amped and tri-amped systems; separate input and output EQ's with numerous filters of various types up to 48 dB/oct; peak, RMS, and frequency dependent RMS limiters; delay for driver time alignment
 - ▶ Comprehensive system/load monitoring
- ✓ Four presets on board with selection button
- ✓ Optimized for 4 Ω loads, thus ideally matching real-world scenarios in targeted applications
- ✓ Fully protected circuit design:
 - ▶ AC protection: shuts down power supply when AC mains voltage is outside operating range
 - ▶ Clip limiter: prevents severely clipped waveforms from reaching loudspeakers, while still maintaining full peak power output
 - ▶ DC protection: protects against infrasonic signal at the outputs
 - ▶ VHF protections: protects the loudspeakers against destructive non-audible, non-musical high frequency signals
 - ▶ Short circuit protection: protects the amplifier from short circuit or similar events on the outputs; with automatic protection reset
 - ▶ Thermal protection: mutes outputs once output devices reach 75 °C / 167 °F; automatic unmute once temperature is down to 65 °C / 149 °F
- ✓ Temperature controlled continuous variable speed fan, front to rear airflow
- ✓ Recessed stepped level attenuators
- ✓ Full four years warranty
- ✓ Also available as M30D without DSP and Ethernet port

1) DSP preset with high-pass filter and output voltage limiter required.


2) DSP preset with high-pass filter required.



M30D HDSP+ETH



2-Channel Power Amplifier with DSP and Ethernet for Touring and Install Applications

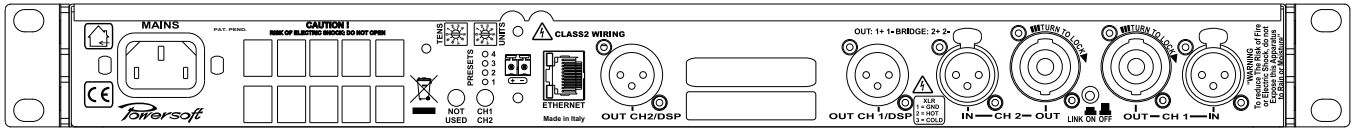

Specifications

General					
Number of channels	2				
Output power	2-channel mode				mono-bridged mode
EIAJ Test Standard, 1 kHz, 1% THD	4 Ω / Ch	8 Ω / Ch	70 V ¹⁾	100 V ²⁾	8 Ω / Ch pair
	1,500 W	900 W	1,200 W	1,500 W	3,000 W
Max output voltage / current	135 V _{peak} / 65 A _{peak}				
AC Mains Power					
Power supply	Universal, regulated switch mode				
Operating voltage / Inrush current	115 V / 230 V (factory selection) ± 15%, 50 Hz - 60 Hz / < 28 A _{RMS}				
Consumption / current draw	@ 230 V		@ 115 V		
Idle	37 W	0.3 A	37 W		0.6 A
1/8 of max output power @ 4 Ω	530 W	3.54 A	530 W		7 A
1/4 of max output power @ 4 Ω	1,024 W	6.52 A	1,024 W		13.04 A
Thermal					
Environmental operating temperature	0° - 45° C / 32° - 113° F				
Thermal dissipation	Fan, continuously variable speed, temperature controlled, front to rear airflow				
Idle	126 BTU/h				32 kcal/h
1/8 of max output power @ 4 Ω	529 BTU/h				133 kcal/h
1/4 of max output power @ 4 Ω	935 BTU/h				236 kcal/h
Audio					
Gain	32 dB, 30 dB, 28 dB, 26 dB, 24 dB, 22 dB, 20 dB, 18 dB, 14 dB, 4 dB, -∞, user selectable				
Frequency response	10 Hz - 30 kHz (1 W @ 8 Ω, ± 3 dB)				
S/N ratio (amplifier section)	108 dBA (20 Hz - 20 kHz, A weighted)				
Crosstalk separation	>70 dB @ 1 kHz				
Input sensitivity @ 8 Ω	2.13 V / 8.8 dBu				
Max input level	6 V / 17.7 dBu				
Input impedance	10 kΩ				
THD+N / SMPTE IMD	≤ 0.08% @ 1/2 of full power				
DIM100 IMD	typ. <0.005% (<0.02% @ >0.1 W)				
Slew rate	40 V/μs @ 8 Ω, input filter bypassed				
Damping factor @ 8 Ω	>5000 @ 100 Hz				
DSP					
A/D converter	CS5381, 2 channels, 24 bit / 48 kHz, 120 dB SNR				
D/A converter	CS4398, 2 channels, 24 bit / 48 kHz, 120 dB SNR				
Frequency response @ -3 dB	7 Hz - 22 kHz				
THD	< 0.01% (20 Hz - 20 kHz)				
Presets	Bank of 4 presets, management and upload via Armonia Pro Audio Suite™				
Delay for time alignment	10 ms per output				
Crossover filters	Butterworth, Linkwitz-Riley, Bessel, 6 dB/oct to 48 dB/oct				
Output equalizer	up to 12 biquad fully parametric per channel: peaking, hi/lo shelving, hi/lo pass, band pass, band stop, all pass.				
Input equalizer	up to 5 biquad filters (PEQ, shelving, band pass, band stop, all pass)				
Limiters	Peak limiter, RMS limiter, frequency dependent RMS limiter				
Damping control	< 120 Hz, range ± 2 Ω				
System Delay	up to 170 ms for 2 IN/2 OUT or 340 ms for 1 IN/2 OUT				
Front Panel					
Indicators	4 LEDs per channel: 3 x green, 1 x red 2 status LEDs: 1 x green, 1 x yellow				
Controls	1 stepped level attenuator pot per channel; mains switch				
Maintenance	Dust filter foam behind front panel				
Rear Panel					
Audio signal input connectors	2 x balanced Neutrik® XLR female				
Loudspeaker output connectors	2 x Neutrik® Speakon NL4MD, 2 x Neutrik® XLR male hard-wired to the corresponding input				
Network data port Ethernet	1 x RJ45 with activity LED with 2 rotary address switches				
DSP preset selection	1 x Pushbutton (stepping through bank of 4 presets); 1 x 4 LED preset indicators				
Aux voltage	1 x 2-pin Phoenix type MC 1.5/2-ST-3.81				
AC mains	IEC C13 16 A connector; AC mains cord with 3-pin plug 15 A for US, IEC Schuko 16 A for every other nation				
Controls	1 x link switch, linking analog inputs 1 & 2				
Construction					
Dimensions	W 483 mm / 19", H 44.5 mm / 1.75", D 358 mm / 14.1"				
Chassis	1 mm (0.04") steel chassis and steel removable dust cover, 3 mm (0.12") steel front panel, screw hole protection, steel side reinforcement & rear support				
Weight	7.3 kg / 16 lb				

1) DSP preset with high-pass filter and output voltage limiter required.

2) DSP preset with high-pass filter required.

Data is subject to change without notice.

© 2012 Powersoft • All rights reserved.

