

GMS 32 / GMS 52

Shock-mounted installation holder with lid



FEATURES

- Optimal isolation from physical vibration
- Rugged design
- Fast and easy set up
- Discreet installation into tables with a thickness between 11 and 55 mm
- Permanently connected 3-pin (GMS 32) or 5-pin (GMS 52) XLR socket
- Swivelling lid
- If required, the lid can be removed or replaced
- Optional lids available on request in different colours and designs (standard colour: black)

APPLICATIONS

GMS 32 / GMS 52 is a shock-mounted installation holder for microphones such as goosenecks or vertical Revoluto. It is suitable for all microphones of the Classis GM, RM and SHM series with XLR plug.

The installation diameter is 49 mm.


VERSIONS

- GMS 32 Installation holder, black, 3-pin XLR . . . Order # 729.582
 GMS 32 W same as above, but white Order # 729.760
 GMS 52 Installation holder, black, 5-pin XLR . . . Order # 729.434
 GMS 52 W same as above, but white Order # 729.779

SPARE PARTS

- Swivelling lid, black Order # 927.643
 Swivelling lid, white Order # 927.651

DIMENSIONS

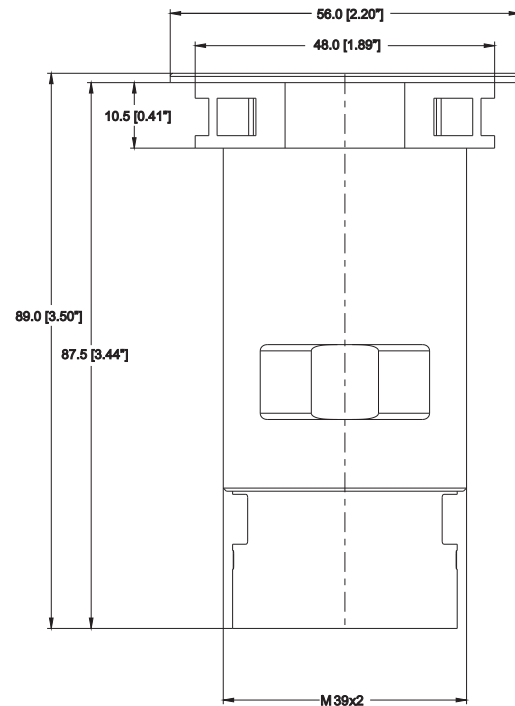

All dimensions in mm and [inch]

INSTALLATION PARAMETERS

- Diameter of the opening in the table 49 mm [1.93"]
 Thickness of the table top 1.5 mm [0.06"]