



Description

The Truffle-KTR26 is the largest model in the compact line of Truffle subwoofers applied when low-end sustain is needed.

The source subwoofer has a frequency range of 45 Hz to 150 Hz and is comprised of a single 6.5" driver with passive radiators. For a hidden installation, the Truffle-KTR26 was designed with an 12"-long cylindrical speaker box equipped with one 6.5" active driver on one end and one

symmetrical 6.5" passive speaker on the opposite end, perfect for an omnidirectional low-end source.


This subwoofer provides the low-end frequencies for the Azimut-KAMUT2L25 audio system.

Technical Specifications

General	
Type	Passive subwoofer
Drivers	6.5" ferrite magnet woofer with 1" voice coil + 6.5" passive radiator
Frequency Response	45 Hz – 150Hz (-6dB)
Max SPL	120 dB ¹
Power handling	100 W
Nominal Impedance	2 Ω
Crossover	External crossover required
Coverage	Omni

Handling & Finishes	
IP Rating	IP64
Dimensions	182 x 176 x 341 mm (7.1 x 6.9 x 13.4 in)
Weight	3.5 kg (7.72 lb)
Colors & Finishes	Black textured powder paint
Recommended Amplifier	Kommander-KA02

¹ Maximum SPL is calculated using crest factor 4 (12dB) measured at 1 m.

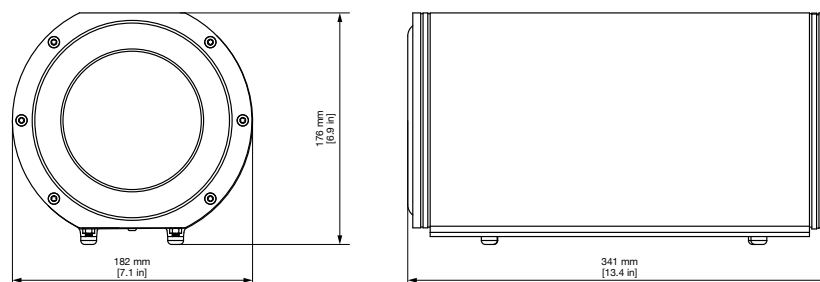

Notes for data:

Passive loudspeakers require dedicated presets loaded onboard K-array amplifiers.
New materials and designs are introduced into existing products without previous notice.