Mighty Mite™

Install Instructions For:
MM43-BGM and MM32-EZ speakers

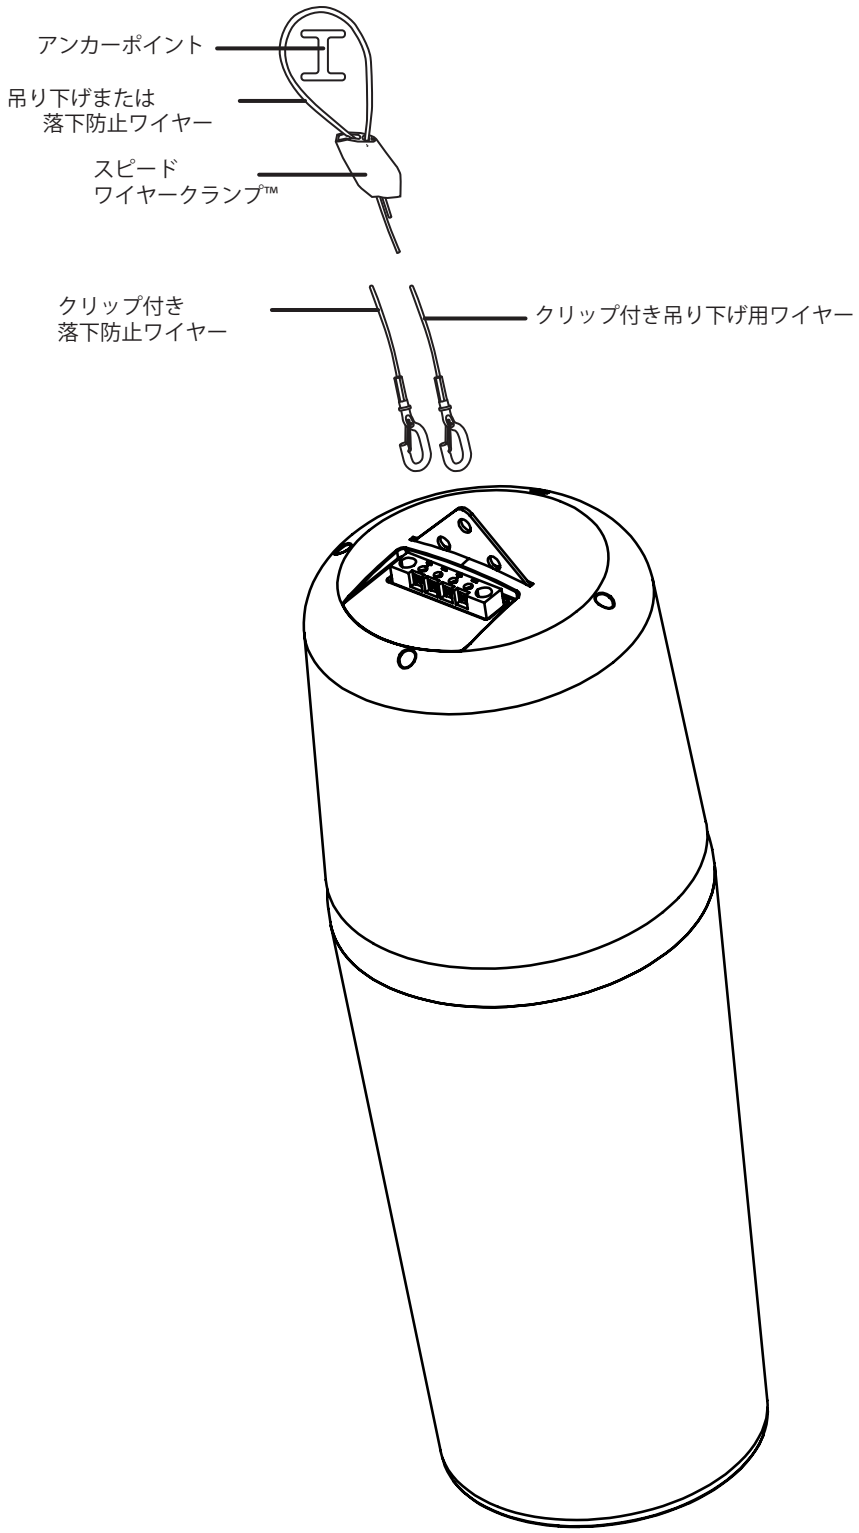

内容物

1 スピーカー
2 スピードワイヤークランプ™
1 リリース専用工具
1 吊り下げようワイヤー
1 落下防止ワイヤー
4 結束バンド

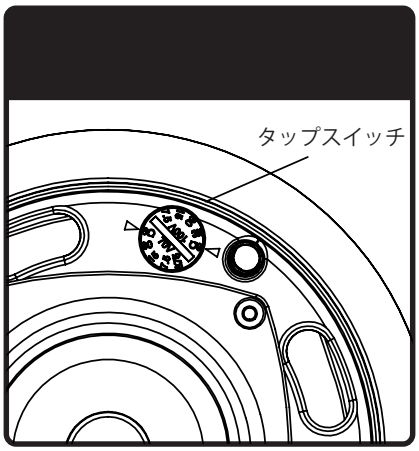

1.855.663.5600 | www.soundtube.com

UL Listed 148 0A

© 2021 MSE Audio SoundTube Entertainment, Inc. All rights reserved. PN INS-MM Rev 11.15.21

Warning

SoundTube speakers must be installed by a professional audio installer/contractor. For safety and for optimum audio performance, installer must follow all directions issued by SoundTube Entertainment.

Warning

Do not spec or install speaker near support beam, ventilation duct or other structure that may interfere with speaker function or dispersion.

Mighty Mite™

Install Instructions For:
MM43-BGM and MM32-EZ speakers



1. マグネットグリルを外すとロータリータップスイッチにアクセス出来ます。
タップの位置を任意の位置に設定します。
最大は70.7Vラインでのみ使用出来ます。



2. シグナルケーブルを端子台の+と−に接続します。



3. デイジーチェーン接続の場合、内側の端子をソース外側の端子に次のスピーカーを繋ぎます。
この手順はトランスを使用したタップ設定の時のみ適用されます。



4. 図のように吊り下げケーブルまたは安全ケーブルをスピードクランプ™に通します。



5. 吊り下げケーブルと安全ケーブルを図のように固定します。



6. 図のように、ケーブルの端をスピードクランプに通します。



7. スピードクランプ™ で吊り下げ位置を調整します。
ケーブルを引いて締めたり図のように付属の六角レンチを使用して緩めたりします。



8. スピーカー吊り金具中央の穴に吊り下げケーブルを取り付けます。



9. 安全ケーブルを他の穴に取り付けます。



10. 結束バンドを使用し安全ケーブルと信号線を吊り下げケーブルに固定します。

© 2021 MSE Audio SoundTube Entertainment, Inc. All rights reserved. PN INS-MM Rev 11.15.21