


CB5 (Cherry Bomb)

Weatherproof, 3-way Direct Burial System with Subwoofer

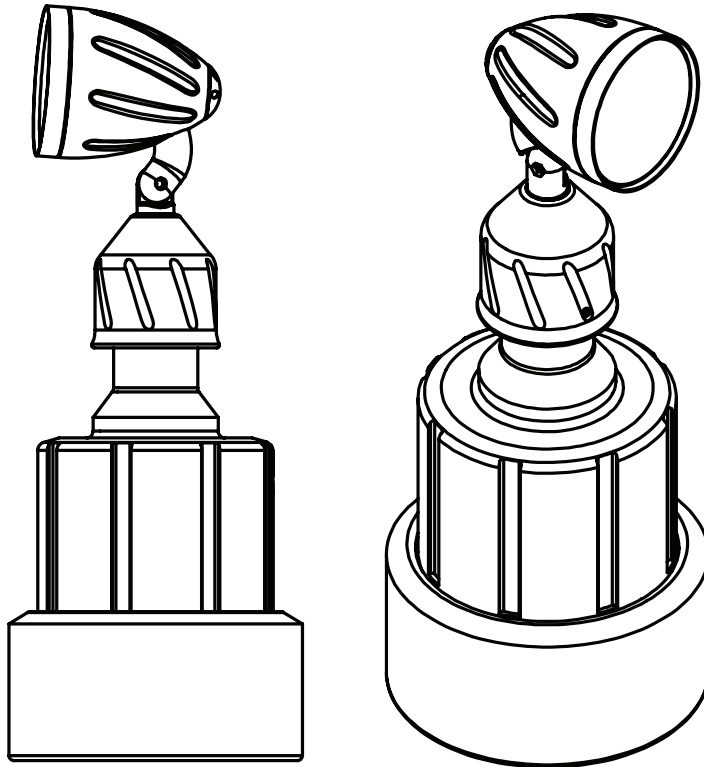

Description: The CB5 speaker is a patented 3-way in-ground, outdoor speaker system that includes a subwoofer, midrange, and tweeter in a single unit. This unique combination provides unprecedented phase-matched audio between the low, mid and high frequencies.

Features:

- Patented 3-way system design offers phase-matched audio across all frequencies.
- Included subwoofer gives great low frequency performance down to 42 Hz (-10dB)
- System provides exceptional audio everywhere in the listening environment.
- Three-way design in a single cabinet allows for simplified installation and system set up.
- Small below ground portion means a smaller hole is required - less digging.
- Full weatherproof speaker system.
- Wire leads for 70V transformer with optional 8 ohm bypass.
- Mid-tweeter assembly can be pivoted up and down.

Applications:

Applications for the Cherry Bomb include outdoor pool areas, patios and courtyards, residential backyards and other outdoor venues.

CHERRY BOMB PRODUCT SPECIFICATIONS

IMPEDANCE	8 Ω
SENSITIVITY dB @ 1W/1M	83.0 dB
FREQUENCY RESPONSE (-3 dB)	50 Hz - 20 kHz
FREQUENCY RESPONSE (-10 dB)	42 Hz - 22 kHz
MAX. PROGRAM POWER	100 W
MAX. CONTINUOUS POWER RMS	50 W
MAX. POWER SPL @ 1M	100 dB
TAP SELECTOR	Wire Leads
TRANSDUCER - LOW FREQUENCY	Subwoofer: 5.25" Vapor Deposited Titanium, 1-1/2" Voice Coil, 16 oz Magnet
TRANSDUCER - MID-RANGE	4" Poly Cone w/ Butyl Rubber Surround
TRANSDUCER - HIGH FREQUENCY	0.75" Titanium Dome Tweeter
ENCLOSURE ALIGNMENT	Dual Chamber Bandpass Woofer, Sealed Midrange and Tweeter
ENCLOSURE MATERIAL	Rotational Molded LPDE Cabinet. Injection Molded UV Stable ABS Vent Cover.
INPUTS	Wire Leads
VISIBLE COLORS	Black and Dark Bronze
HEIGHT (SM = HEIGHT)	26.50 in / 673.1 mm
DIAMETER (SM = WIDTH)	10.63 in / 269.9 mm
WEIGHT	15.6 lb / 7.1 kg
SHIPPING WEIGHT	16.5 lb / 7.5 kg

Rockustics®

10661 Rene Street
 Lenexa, KS 66215
 Phone: 913.663.5600
 Fax: 913.663.3200
 Toll Free: 855.663.5600
www.rockustics.com